


Pasta Processing Plant

Laboratory Mixers MLH

20

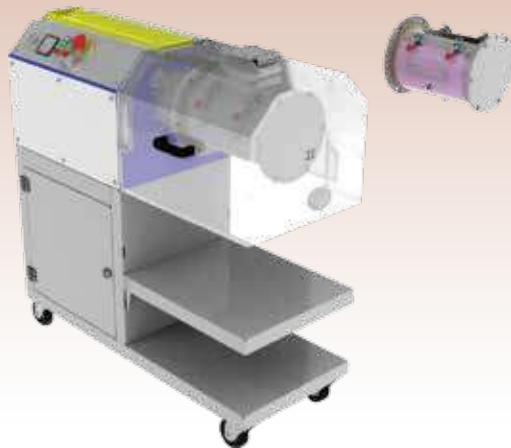

Description ▼

MLH is a Laboratory Mixers which was developed for R&D purposes and small scale production in the field of mixing technology in virtually all sectors and applications.

The MLH Laboratory Batch Mixer consists of a stand-alone drive unit with incorporated frequency inverter, an easily replaceable horizontal mixing shaft supported at the drive end only, and an equally easily replaceable, revolving mixing vessel complete with inlet/outlet.

Function ▼

MLH Laboratory Batch Mixers operate on the principle of a mechanically generated fluid bed. Consequently, it is possible to test using different mixing technologies: mixing, moistening/coating, agglomerating/granulating, as well as reacting/drying. This ensures efficient product and process development as required by the industry today. The quick replacement of drum size combined with a rich basic equipment package ensures use in a variety of applications. In some cases, to obtain the desired mixing effect, a separately driven high-speed chopper can be installed.



Application ▼

The MLH Laboratory Mixer can be easily moved from one location to another. For the user this means optimum versatility in operating the equipment.

Benefits ▼

- ✓ Short mixing time;
- ✓ Ideal for product and process development;
- ✓ Table top or free standing, mobile unit on wheels;
- ✓ Variety of options;
- ✓ Easy to use, clean and maintain;
- ✓ Stainless steel design;
- ✓ Quick and easy replacement of interchangeable shafts;
- ✓ Ergonomic handling;
- ✓ Attractive price.

Pasta Processing Plant


Laboratory Mixers MLH



Technical Features / Performance ▼

- ▶ Range: 6, 12 and 30 litres (1.2 to 26 litres of net working capacity)
- ▶ Drive: 1.1 kW for 6 and 12 litres; 2.2 kW for 30 litres
- ▶ Capacity: 2 to 15 batches per hour (depending on recipe and configuration of the unit)
- ▶ Chopper units (for size 12 and 30 litres only)
- ▶ Quick release of mixing vessel
- ▶ Prearrangement for liquid injection

Overall Dimensions ▼

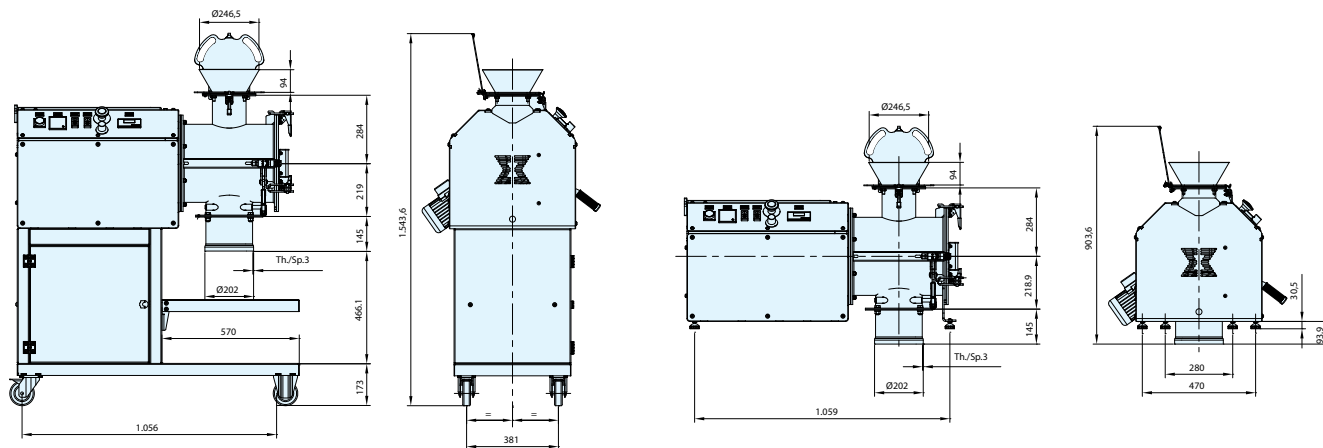

Total volume	30 litres
Minimum Working Volume	6 litres
Maximum Working Volume	24 litres
Drive Power	2.2 kW
Rotation Speed	70 – 270 rpm
Chopper Power	0.12 kW
Chopper Rotation speed	1,450 rpm
Weight	275 kg

DSS 120.MLH EN May 2013.000 Rights reserved to modify technical specifications.

This datasheet might not show the complete range but only the models specialised for the application.