

Asphalt Mixing

External Electric Vibrators MVE

21



Description ▼

The range of “MVE” External Electric Motovibrators is the result of more than 50 years of experience in vibration technology for various industrial applications worldwide. OLI® External Electric Vibrators afford a guarantee of long-term durability reflecting the care taken over selection of components and the high level of precision adopted in manufacture.

Function ▼

In asphalt plants “MVE” External Electric Motovibrators are used for aiding aggregate flow from hoppers and silos to the drier drum, as well as additives from FIBC dischargers.



Application ▼

“MVE” External Electric Motovibrators are used in asphalt mixing plants where flow aids are required. Typical applications are as discharge aids for aggregates and subsequent cleaning of the aggregate hoppers.

Fitted on the hopper of an SBB-type FIBC Discharger, the MVE Electric Motovibrator ensures complete emptying of the additive from the bulk bag.

Benefits ▼

- ✓ Oversized SKF bearings;
- ✓ 2-years-warranty including electric components;
- ✓ Ex-stock delivery;
- ✓ Certificates available: Ex/CE/ETL/GOST/Baseefa/IEC/IECEx.



www.wamgroup.com

Asphalt Mixing


External Electric Vibrators MVE



Technical Features / Performance

- ▶ Aluminium casing up to size 50 (included), cast iron from size 60
- ▶ SKF bearings
- ▶ Operating temperature: -20° C to 40° C (-4° F to 104° F)
- ▶ Multiple voltages: 220-240/380-415 V, 50 Hz
- ▶ 750 - 1,000 - 1,500 - 3,000 R.P.M. (900 – 1,200 – 1,800 – 3,000 R.P.M.)
- ▶ Multiple fixing bores
- ▶ Motor protection: IP 66-NEMA 4
- ▶ Continuous duty: S1
- ▶ Insulation class: F
- ▶ Standard: ATEX Ex II 3D CERTIFIED
- ▶ Standard: ETL (UL-CSA) Class II Div.2
- ▶ ATEX Exe II 2 GD increased safety range available
- ▶ Explosion-proof range available

Overall Dimensions

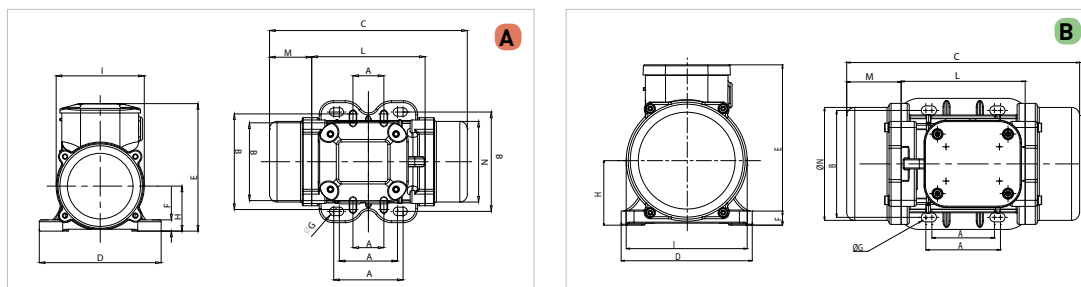

3 Phase		1 Phase	Drawing	Size	Overall dimension																						Weight				
					c		m		a		b		ø g		N° Holes	d		e		f		h		i		l			n		
Type 50 / 60Hz	U.S. Market 60 Hz	Type 50 / 60 Hz			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(Kg)	(Lb)
MVE 60/3	MVE 160/2	MVE 60/3M	A	10	211	8.31	45	1.77	62-74	2.44-2.91	106	4.17	9	0.35	4	130	5.12	136	5.35	12	0.47	48	1.89	94	3.70	121	4.76	85	3.35	4.2	9.3
100/3	MVE 220/2	100/3M							33	1.30	83-102	3.27-4.02	7	0.28																4.6	10.1
MVE 200/3	MVE 440/2	MVE 200/3M	B	20	231	9.09	54	2.13	62-74	2.44-2.91	106	4.17	9	0.35	4	131	5.16	159	6.26	15	0.59	64	2.52	121	4.76	123	4.84	112	4.41	7.0	15.4

MVE 3 Phase Series

3 Phase		Mechanical Features								Electric Features													Cable Type		
		Working moment [°]				FC				Power				Current		Power Factor		Ia/In		ClassII Div.2	II 2D	Cable Type			
		Kg*cm		in*Lb		Kg		Lb		Kw		Hp		A max [V]								Type	U.S. Mar- ket	Cable Gland	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50 Hz	60 Hz	50 Hz	60 Hz	400V	460V	50Hz	60Hz	50Hz	60Hz	Temp. Class	Temp. Class	Class Temp.	Type: AWG (SOW) Class Temp.	Class Temp.	
Type 50 / 60 Hz	U.S. Market 60 Hz																			T	(°C)				
MVE 60/3	MVE 160/2	1.3	0.9	1.1	0.9	66	71	145.5	156.5	0.08	0.09	0.11	0.12	0.16	0.18	0.74	0.82	3	3	T4	100	4G1.5 80°C	18-4c 90°C	M16 80°C	
MVE 100/3	MVE 220/2	1.9	1.3	1.7	1.1	98	95	216	209.4	0.1	0.11	0.13	0.15	0.19	0.18	0.76	0.85	3	3						
MVE 200/3	MVE 440/2	3.7	2.6	3.2	2.3	187	189	412.3	416.7	0.18	0.21	0.24	0.28	0.35	0.35	0.78	0.87	3.3	3.30						
MVE 202/3	MVE 444/2	3.7	2.6	3.2	2.3	187	189	412.3	416.7	0.18	0.21	0.24	0.28	0.35	0.35	0.78	0.87	3.3	3.30						
MVE 300/3	MVE 690/2	6.4	4.5	5.5	3.9	321	323	708	712.1	0.27	0.28	0.36	0.38	0.52	0.45	0.84	0.89	3.60	3.50	T4	100	4G2.5 80°C	16-4c 90°C	M20 80°C	
MVE 400/3	MVE 890/2	7.9	5.7	6.9	4.9	407	411	897	906.1	0.30	0.36	0.40	0.48	0.58	0.60	0.88	0.88	3.50	3.50						
MVE 500/3	MVE 1200/2	10.3	7.4	8.9	6.4	530	534	1168.4	1177.3	0.50	0.58	0.67	0.78	0.96	0.97	0.84	0.87	4.00	4.20						
MVE 700/3	MVE 1700/2	14.9	10.6	12.9	9.2	758	765	1671.1	1686.5	0.66	0.75	0.89	1.01	1.25	1.24	0.83	0.88	4.30	5.00						
MVE 800/3	MVE 1800/2	15.7	11.1	13.6	9.6	794	800	1750.5	1763.7	0.75	0.90	1.01	1.21	1.45	1.50	0.79	0.84	3.80	3.80	T4	100				



OLI®



WAMGROUP

www.wamgroup.com